

# (12) UK Patent Application (19) GB (11) 2 352 041 (13) A

(43) Date of A Publication 17.01.2001

(21) Application No 9916350.3

(22) Date of Filing 14.07.1999

(71) Applicant(s)  
**Schlumberger Limited**  
(Incorporated in the Netherlands Antilles)  
5 Julianaplein, Curacao, Netherlands Antilles

(72) Inventor(s)  
**Michael Charles Sheppard**  
**Thomas Harvey Zimmerman**

(74) Agent and/or Address for Service  
**William L Wang**  
**Schlumberger Cambridge Research Limited, High**  
**Cross, Madingley Road, CAMBRIDGE, CB3 0EL,**  
**United Kingdom**

(51) INT CL<sup>7</sup>  
**E21B 47/12 // G08C 23/00**

(52) UK CL (Edition S )  
**G1N NAHJA NCLH N3S7 N7A1 N7B1 N7C N7E2**  
**U1S S1248 S2318**

(56) Documents Cited  
**EP 0780702 A1** **US 5259452 A**  
**NATIONAL RECONNAISSANCE OFFICE: "The Corona**  
**Satellite", [accessed 04/02/2000] retrieved from the**  
**internet via <URL http://www.nro.odci.gov/corona/**  
**sysinfo2.html>**

(58) Field of Search  
**UK CL (Edition R ) G1N NAHJA NAHJD NCLH NCSE**  
**INT CL<sup>7</sup> E21B , G01V , G08C**  
**Online: World Patents Index, EPODOC, Patent**  
**Abstracts of Japan, World Wide Web**

(54) Abstract Title

**Sensing apparatus with releasable data storage elements**

(57) A sensing apparatus for use downhole comprises sensing means 52, 54, 56, 58 and a plurality of separable elements 64 located within a housing 22. Data acquired by the sensing means is transferred to one or more of the elements 64, which are released from the housing 22 to convey the data to the surface. The separable elements may comprise a memory chip and a spherical outer casing. A sealable aperture may be provided so that an electrical connection between the chip and bus 66 can be established.

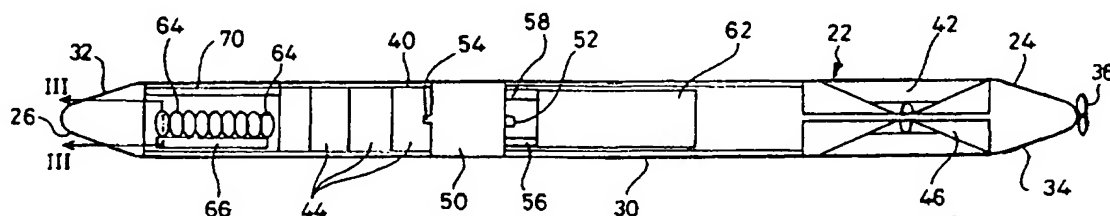


Fig. 2

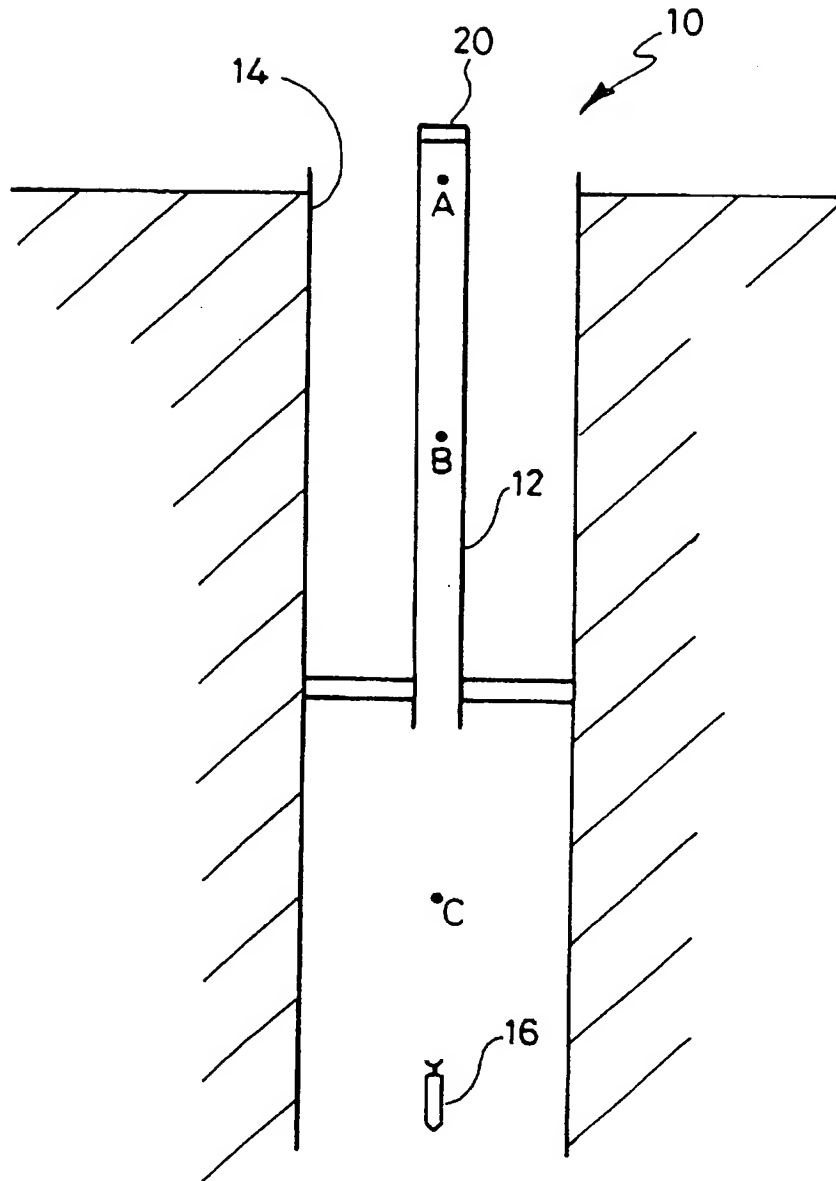


Fig. 1

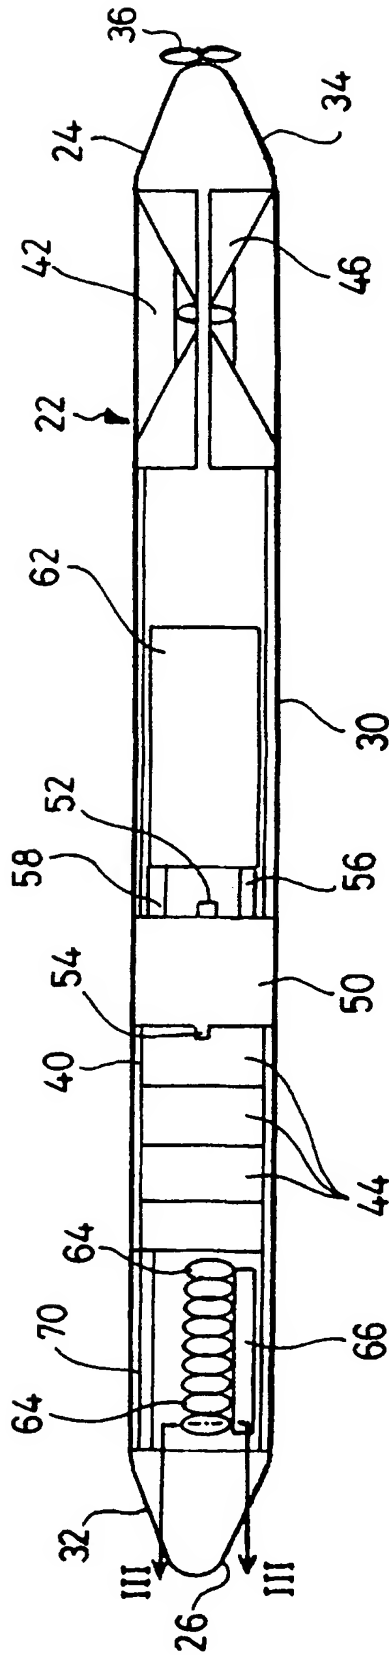


Fig. 2

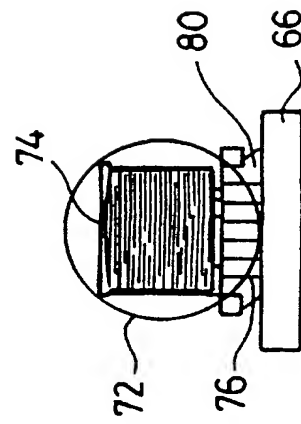


Fig. 3

Downhole Sensing Apparatus With Separable ElementsFIELD OF THE INVENTION:

5       The invention relates to a sensing apparatus particularly suitable for use downhole within oil and gas wells.

BACKGROUND OF THE INVENTION:

10       Gathering of information relating to a well is possible by lowering a logging tool on a wireline into a well. The logging tool acquires data relating to the well characteristics, such as fluid velocity and temperature, and typically transmits the logged data to surface by telemetry along the wireline. However  
15       logging tools on wirelines often get caught within the well, leading to problems of acquiring data at desired positions and also retrieval of the tool.

20       Self-powered robotic logging devices have been developed to avoid the need for use of a wireline. It is relatively easy to get a self-powered robotic device to the bottom of a well because downwards travel of the device involves moving from smaller diameter production tubing to larger diameters at the bottom of  
25       the well. However difficulties occur in retrieving such devices because the return journey to the surface involves locating, and passage through, the smaller diameter opening.

30       It is one aim of the present invention to provide a sensing apparatus which at least in part

overcomes the existing difficulties with robotic logging devices.

5    SUMMARY OF THE INVENTION:

          In accordance with one aspect of the invention, there is provided sensing apparatus comprising a housing and sensing means, characterised  
10    in that the housing contains a plurality of separable elements to which data acquired by the sensing means is transferred, and which are releasable, after data transfer, from the housing.

15           The separable elements act as passive receptors for data acquired from the sensing means, and in this way, an autonomously powered device can be sent downhole and left in place while data is transferred to the surface over time by sending the separable elements  
20    back to the surface, so extending the useful lifetime of the sensing apparatus.

          The sensing means may include or be connected to electronic memory means which temporarily stores the  
25    acquired data. The stored data can be downloaded to a further memory device in a separable element when required.

          Preferably the sensing apparatus comprises  
30    actuable port means, openable to release the separable elements.

Preferably the separable elements each  
comprise a rigid casing, with a sealable aperture, the  
casing surrounding data storage means, such as a memory  
5 chip, in which the acquired data is stored for transfer  
to the surface. The aperture allows a connection to be  
made to the data storage means therein so that data can  
be written thereto. Closure and sealing of the  
aperture permits watertight sealing of the element to  
10 protect the memory chip from wellbore fluids once the  
separable element is released.

Preferably the aperture is surrounded by a  
sealing material, typically made of thermosetting  
15 plastics material, which can be heat treated within the  
housing so as to provide a fluid-tight seal which is  
continuous with the casing surface. This improves the  
robustness of the separable element.

20 The separable elements are preferably  
spherical so as to reduce the likelihood that they will  
snag on protrusions within the interior of the well.  
Thus typically each separable element will comprise two  
hollow metal hemi-spheres, joined by a plastics seal to  
25 form a sphere.

Preferably the separable elements are also  
configured to be either neutrally buoyant, or buoyant,  
in relation to well fluids, so that they are easily  
30 carried to surface.

Generally the separable elements have a diameter in the range of 1 to 10cm, and more preferably in the range 1 to 5cm, so that they can easily transfer from downhole large diameter sections to smaller diameter tubing nearer the surface. Typically a large number of separable elements are contained in the housing, of the order of 100-500 elements.

The housing of the sensing apparatus and the casings of the separable elements may be formed from plastics material or metal.

The invention also lies in the provision of separable elements in a downhole sensing apparatus as aforesaid.

In accordance with another aspect of the invention, there is also provided a method of acquiring data from downhole, comprising placing downhole a sensing apparatus containing a number of separable elements and releasing the elements to carry acquired data to the surface as required.

#### BRIEF DESCRIPTION OF THE DRAWINGS:

The invention will now be described by way of example, and with reference to, the accompanying drawings in which:

Figure 1 shows a schematic diagram of a sensing apparatus according to the present invention during travel downhole;

5                   Figure 2 shows a cross-section of the sensing apparatus; and

Figure 3 shows a section along line III-III of Figure 2.

10

DETAILED DESCRIPTION OF THE INVENTION:

In Figure 1, a completed well 10 is shown, with production tubing 12 cemented into position centrally within a borehole 14. The production tubing 12 is capped at surface and an autonomous sensing apparatus or tool 16, which has been transferred through a cap 20 to travel downhole under its own power, is shown passing down the wellbore 14 from position A to position B, and thence to beyond position C where it emerges into the completion.

As the tool 16 passes downhole, data is either acquired continuously by the tool 16 or acquired at fixed depths along the wellbore 14, with the tool 16 measuring various characteristics including pressure, temperature, flow rate and chemical species. These measurements are referenced to the position in the completion either by counting casing collars and using existing knowledge of the location of perforation sites within the walls of the completion, or by integrating



the velocity of the tool as derived from on-board sensors.

5 The velocity of the tool 16 is typically sensed by including a pair of sonic source/sensor packages or a pair of infra red source/sensor packages to sample the borehole wall and configure such that cross-correlation of the source/receiver pair will provide velocity of the tool.

10

The sensing apparatus 16 is shown in cross-section in Figure 2. This robotic device has a body 22 with a total length of around 2.1m and is generally comprised of three sections, a rear 24, a front 26 and  
15 a middle section 30. The middle section 30 is a hollow cylindrical metal casing of diameter 0.114m which contains and surrounds components carried by the device 16. Attached to each end of the middle section 30 are respective cone sections 32, 34 which are truncated  
20 with a hemi-spherical surface to improve the aerodynamic structure of the device.

The first cone 32 forms a front nose of the device 16, with the second cone 34 attached to the rear  
25 of the casing carrying a propeller 36. To strengthen the device 16, an internal carbon fibre wall 40 formed as a hollow cylinder around 7mm wall thickness is inserted into the middle section 30 to improve rigidity and robustness of the device 16, and also to protect  
30 components contained within the middle section when downhole. The carbon fibre wall 40 thus encases active

sensing and data storage components which are contained within the device 16, and the wall 40 is generally provided with a number of individual compartments so that different parts of the middle section 30 can be sealed with respect to other compartments.

Towards the rear end of the middle section 30, a motor 42 is provided which is attached to the propeller 36 carried on the second cone 34. The motor 42 and other electrical components within the device are powered by three batteries 44 arranged in series, and the motor 42 turns the propeller 36 to drive the device 16 downhole. Where the motor 42 and propeller 36 are attached, shaft seals 46 are used to ensure that the rear end of the middle section is sealed against external fluid.

A ballast holder 50 is placed centrally of the middle section 30, and an appropriate amount of ballast introduced into this container so that the tool 16 is neutrally buoyant, i.e. it neither sinks nor rises within the fluid downhole. This ensures that the tool 16 can be powered through the produced fluids by the motor 42 and associated propeller 36. A variety of sensors 52, 54, 56, 58 are included within the body of the device 16 to sense various parameters downhole including pressure, temperature, flow rate, chemical species, magnetic flux and fluid composition. The data provided by the sensors 52, 54, 56, 58 is stored in data acquisition and control board 62 which, like the motor 42, is powered by the three batteries 44.

Towards the front end of the middle section,  
a large number of releasable elements 64, or memory  
fish, are contained in a front compartment 68 which is  
5 sealed from the remainder of the device. The  
compartment need not be sealed hermetically. The  
releasable elements 64 are carried on and detachably  
connected to a bus 66 which is in electrical  
communication with the data acquisition and control  
10 board 62. The front compartment 68 is provided with a  
flap 70 in its external wall, which whilst normally  
closed, opens to allow release of selected fish in  
response to a command from the control board 62. The  
control board 62 is pre-programmed at surface before  
15 the device 16 goes downhole with a program which  
instructs release of the elements 64 in a chosen  
manner, typically to release a small number of fish at  
spaced apart intervals of time over a few years.

20 Each fish 64 comprises a hollow sphere 72 of  
around 3 to 5cm diameter made substantially of metal  
and which encases a memory chip 74 to which data can be  
downloaded via bus 66 from the data acquisition and  
control board 62. The sphere 72 has an aperture 76  
25 surrounded by heat-sealable material, such as  
thermosetting plastics material, so that the fish is a  
completely sealed device. Electrodes 80 on the bus 66  
communicate with the memory chip 74 of each fish 64  
either inductively or by any other indirect means such  
30 as infra-red, or by direct contact through electrical  
pin conductors attached to the electrodes 80 protruding

into the sphere through the aperture as shown in Figure 3 so as to establish an electrical connection with the chip. Additionally, the data can be encrypted prior to being transferred to the fish. For example, the  
5 encryption could be carried out on data acquisition and control board 62, and the encrypted data could be transmitted to memory chips 74 as described.

When a fish is ready for release, it is  
10 mechanically raised from the location where it mates with the electrodes 80 so as to separate it from the electrodes on the bus. The opening where the electrodes connected with the chip is sealed by use of a heating element on the sealable material so as to  
15 form a substantially smooth water-tight sphere, and then the fish is released. The smooth sealed sphere is robust and resistant to ingress of fluid.

The fish 64 are essentially chips embedded in  
20 low density plastics material and can be as small as 1cm<sup>2</sup>, or less, and larger if necessary.

The robotic device 16 can carry up to hundreds of small memory fish 64, which are either  
25 neutrally buoyant or partially buoyant and after each set of measurements instructed via the control board 62, the board downloads the collected data to a chosen number of fish 64, and then instructs separation of the selected fish from the bus 66, sealing of the spheres  
30 74 ready for release, and then opening of flap 70 to release the spheres 74. The fish released into the

fluid flowing in the well are swept upwards and are then retrieved at surface. Retrieval of the fish at surface can be assisted by selecting the size and shape of the plastics body 72 of the fish. Typically the  
5 same data is written to more than one fish so that the chances of retrieval of the data are maximised. If the data in the fish had been encrypted, the data will then be decrypted after retrieval.

10 Before release of the memory fish 64 into the flow, the tool 16 is programmed to send an acoustic signal by using a transducer, the acoustic signal travelling to surface either via the fluid or the tubulars, so as to alert crew at surface that the  
15 release is about to take place and that steps should be taken to retrieve the memory fish. Alternatively the fish may be released at a pre-determined time.

By using the memory fish 64, a robotic  
20 production logging device which has been sent to the bottom of a well can lie within the well over a period of time whilst still providing measurements that can be sent to surface via the fish. By providing a large number of memory fish, typically 300-500, within the  
25 sensing apparatus and releasing these at selected intervals, the well can be monitored over, for example, 3 to 5 years.

With a robotic logging device, it is much  
30 easier to send the device to the bottom of a well than it is to get it to travel back to surface. This is

largely because of the geometry of the tubulars used to encase the internal wall of the well structure as when the robotic device travels from position A to position C, for example, the device moves from smaller diameter tubes of the production tubing to larger tubes of the completion. For the robotic device to travel back to surface, it must travel from a larger diameter tube into a smaller opening, which involves difficulties with locating and entering the smaller tubing. The present invention allows the logging device to remain downhole, whilst still permitting logged data to reach the surface by using the small passive data receptors to carry data to surface by being carried up within the fluid to the surface.

15

The tool can thus sample the well over depth and over periods of time to provide information about the evolution of the downhole flow and fluid character, both of a chemical and physical nature. The device provides a simple production logging tool which avoids well intervention and ensures that wells can be logged cheaply when a convention approach would be too costly.

The sensing apparatus does not necessarily need to be an autonomously powered device, but could be provided either on wireline or even within the casing used to complete the well.

While preferred embodiments of the invention have been described, the descriptions are merely

illustrative and are not intended to limit the present invention.

## CLAIMS

What is claimed is:

- 5           1. A sensing apparatus comprising a housing and sensing means, characterised in that the housing contains a plurality of separable elements to which data acquired by the sensing means is transferred, and which are releasable, after data transfer, from the  
10 housing.
2. A sensing apparatus according to claim 1, wherein the sensing means includes or is connected to electronic memory means which temporarily stores the  
15 acquired data.
3. A sensing apparatus according to claim 1 or claim 2, wherein the sensing apparatus further comprises an actuatable port means, openable to release  
20 the separable elements.
4. A sensing apparatus according to any of the preceding claims, wherein the separable elements each comprise a rigid casing with a sealable aperture,  
25 the casing surrounding data storage means in which the acquired data is stored for transfer to the surface.
5. A sensing apparatus according to claim 4, wherein the sealable aperture is formed by an aperture  
30 surrounded by a sealing material, with the sealing material being heat treatable within the housing so as



to provide a fluid-tight seal which is continuous with the casing surface.

5       6. A sensing apparatus according to any of the preceding claims, wherein the separable elements are spherical.

10       7. A sensing apparatus according to claim 6, wherein each separable element comprises two hollow metal hemi-spheres, joined by a plastics seal to form a sphere.

15       8. A sensing apparatus according to any of the preceding claims, wherein the housing of the sensing apparatus and casings of the separable elements are formed from plastics material or metal.

20       9. A sensing apparatus according to any of the preceding claims, wherein the separable elements are configured to be either neutrally buoyant or buoyant, in relation to well fluids.

25       10. A sensing apparatus according to any of the preceding claims, wherein the separable elements have a diameter in the range of 1 to 10cm.

30       11. A sensing apparatus according to any of the claims 1 to 9, wherein the separable elements have a diameter in the range 1 to 5cm.

12. A sensing apparatus according to any of the claims 1 to 11, wherein the data is encrypted prior to transfer to the separable elements.

5                   13. A method of acquiring data from downhole, comprising placing downhole a sensing apparatus containing a number of separable elements and releasing the elements to carry acquired data to the surface as required.

10

14. Apparatus and method substantially as herein described with reference to, and as illustrated in, the accompanying drawings.

15



Application No: GB 9916350.3  
Claims searched: 1-14

Examiner: Diana Pisani  
Date of search: 7 February 2000

**Patents Act 1977**  
**Search Report under Section 17**

**Databases searched:**

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK CI (Ed.R): G1N NAHJA, NAHJD, NCLH, NCSE

Int CI (Ed.7): E21B, G01V, G08C

Other: Online: World Patents Index, EPODOC, Patent Abstracts of Japan, World Wide Web

**Documents considered to be relevant:**

Category	Identity of document and relevant passage	Relevant to claims
X	EP0780702 A1 INSTITUT FRANÇAIS DU PÉTROLE, note removable memory module 11.	1,13 at least
X	US5259452 INSTITUT FRANÇAIS DU PÉTROLE	1at least
X	NATIONAL RECONNAISSANCE OFFICE: "The Corona Satellite", [accessed 04/02/2000] retrieved from the internet via <URL <a href="http://www.nro.odci.gov/corona/sysinfo2.html">http://www.nro.odci.gov/corona/sysinfo2.html</a> > , see especially "The major components of the CORONA camera system".	1,3 & 4

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

